



PVA fed Sensor less PI controller speed control of induction motor

Ashwini Kumar Bharti¹ Durgesh Vishwakarma²

M. Tech Scholar, Department of Electrical & Electronics Engg. REC Bhopal (India)¹

Assistant Professor, Department of Electrical & Electronics Engg. REC Bhopal (India)²

Abstract: In this paper a PI structure sensor less vector controller of induction motor is proposed fed with PVA. The speed of the induction motor is estimated by speed estimator with three phase voltages and currents inputs. The induction motor is controlled by six switch inverter for which the pulses are generated by hysteresis current loop controller. The speed is estimated through estimated stator flux. The proposed system includes solar photovoltaic (PV) array, a three phase voltage source inverter (VSI) and a motor-pump assembly. An incremental conductance (InC) based MPPT (Maximum Power Point Tracking) algorithm is used to harness maximum power from a PV array. The controller includes speed regulator with PI controller which is used for improving the speed of induction motor.

Keywords: PV array, vector control, speed estimator, pi controller, hysteresis current controller.

1. Introduction

In the modern era of development, renewable resources of energy are being advocated by many countries to meet the increasing demand of electrical energy due to rapid depletion of non-renewable resources [1]-[2]. Solar PV based energy generation, has come up as an important alternative for many purposes [3]. The irrigation sector is one of the major sectors where solar PV power is extensively used for water pumping [4-5]. Solar PV water pumping has been initially realized using the DC motor. However, with all due virtues associated with the induction motor in terms of mechanical simplicity, ruggedness, reliability, low cost, higher efficiency and lower maintenance than the DC motors, it has replaced DC motors. Here, a solar PV array fed induction motor drive using vector control is used [6]-[7] As one knows that solar PV power depends on solar insolation and temperature. The characteristic of PV module exhibits a single power peak. An extraction of maximum power is very important part of the PV system. Therefore, various MPPT (Maximum Power Point tracking) techniques have been developed and explained in the literature. These algorithms vary in their speed, range of effectiveness and complexities [8]. Here, an incremental conductance (InC) based MPPT algorithm is used to track MPPT. This algorithm is developed to overcome some drawbacks of perturb and observe (P&O) algorithm. InC algorithm improves the tracking time and to produce increased

energy on a vast irradiation changes. Moreover, it has advantage over P&O method, which increases losses in slow varying atmospheric condition as it oscillates around MPP [9]-[10].

Most of the existing induction motor drives (IMDs) incorporate one DC-DC converter and a VSI (Voltage Source Inverter) for achieving MPPT and maximum efficiency of the motor [11]. Moreover, the DC link voltage regulation is achieved by VSI itself. However, the system requires at least seven power converter switches and hence switching losses are increased. This further includes a DC-AC conversion with a VSI feeding a vector-controlled three-phase IMD. Therefore, there is a need to use single stage controlled drive for water pumping and thereby decreasing number of switches and losses. In single stage system, a VSI has to maintain the MPP as well as DC link voltage is also controlled by it. Therefore, variable DC link voltage cannot be achieved as explained in [12]-[13].

The vector control strategy is superior to scalar control in terms of speed of response and accuracy as explained in [14]-[16]. In the vector control technique, an AC motor is operated in such a manner to behave dynamically as a DC motor by using feedback control [16]. This technique enables to vary the speed over the wide range. Hence with the advancement of power electronics and by using powerful microcomputer and DSPs, the vector control ousts scalar control [17]-[19]. In this vector control scheme, the stator flux is estimated in stationary $\alpha\beta$ frame, which is used to estimate the slip speed (ω_{sl}), synchronous speed (ω_e) and the motor speed as explained in Fig.1

the derivative of the error (derivative action) [13]. The corresponding equation is given as:

$$u(t) = K_p e(t) + K_i \int_0^t e(t) dt + K_d \frac{d}{dt} e(t)$$

Where $u(t)$ is the actuating signal, $e(t)$ is the error signal, K_p is the proportional gain constant, K_i is the integral gain constant and K_d is the derivative gain constant. The PID control offers the simplest and yet most efficient solution to many real-world control problems by means of its three-term functionality covering treatment to both transient and steady-state responses. Shown in fig. 2 is schematic diagram of PI proposed control system.

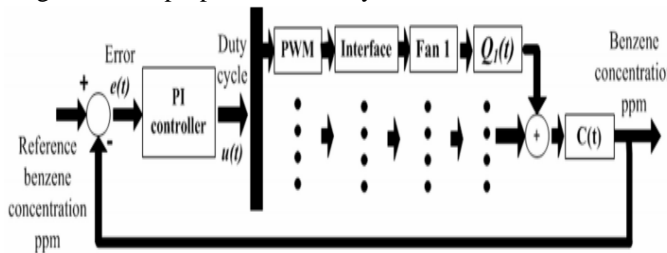


Fig. 2 Proposed PI control system.

3. Simulation Result and Discussion

The implementation of the proposed algorithm is done over MATLAB (R2016). The signal processing toolbox helps us to use the functions available in MATLAB Library for various methods like Windows, shifting, scaling etc.

3.1 System Parameter

Parameter	Value
Temperature of PV	35° C
Irradiation (maximum)	1000 w/m ²
Irradiation (minimum)	500 w/m ²
DC link capacitor	2500μF
IGBT Internal Resistance	0.001 ohm
Rating of induction motor (power)	10(HP) or 7.5Kw
Lint to line voltage	400V
Frequency of IM for 1440 rpm	50Hz
Proportional Gain	0.1
Integral Gain	2
Stator resistance (Rs)	0.7384 ohm
Stator inductance(Ls)	0.003045 henry
Rotor resistance (Rs)	0.7402 ohm
Rotor inductance(Ls)	0.003045 henry
Mutual inductance (Lm)	0.1241 henry
Pole pairs	2

Table 3.1: Parameter used in simulation

3.2 Simulation result and discussion:

PVA fed Sensor less speed control of induction motor using vector control technique. The proposed model is shown in fig. no.3.1 The proposed model is consisting of seven major component .such as photo voltaic array ,dc link capacitor connected with voltage source inverter, speed estimator(MRAS) speed controller, PI controller.

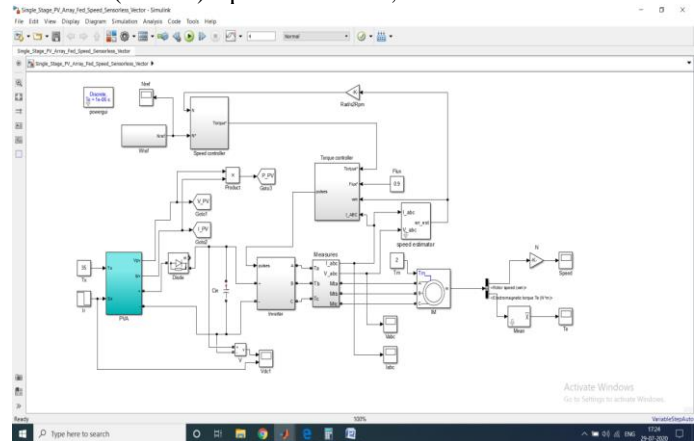


Fig. 3 Proposed system with PVA fed to induction motor

In a Fig. 3 is the three phase induction motor connected to six switch converter fed by PVA with variable solar irradiation. The converter is controlled by vector control with speed and torque individual controllers. The below are the speed regulator and torque controller with PI controller. The internal sub system of speed regulator of pi controller is shown in figure 4.

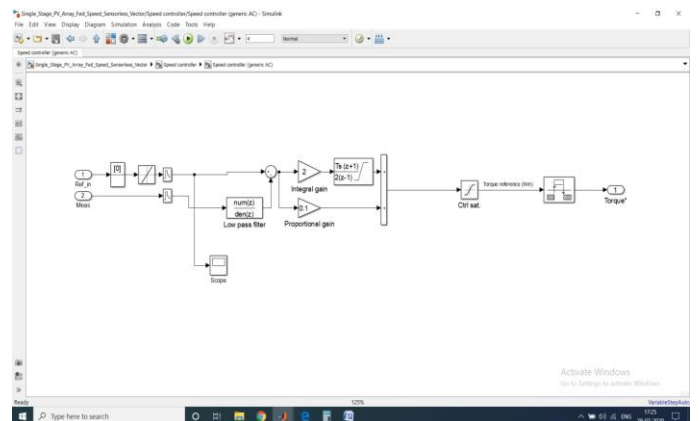


Fig. 4 Speed regulator with PI controller

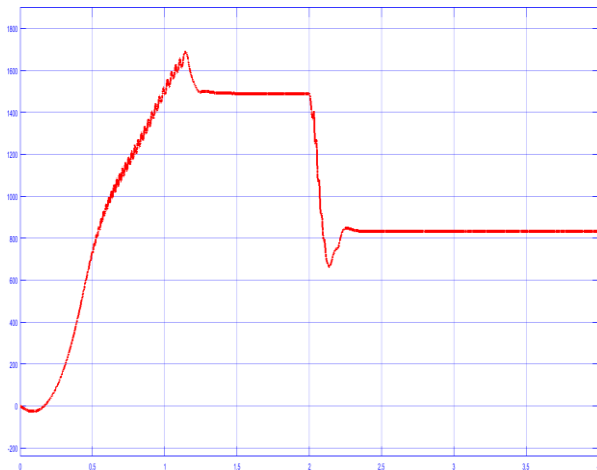


Fig. 5 Speed of induction motor with pi controller



Fig. 5 Electromagnetic torque with PI Controller

The below (fig.6) is the speed regulator with fuzzy logic controller connected by two input variables and one output variable. Each variable comprises of 7 membership functions with 49 rule base.

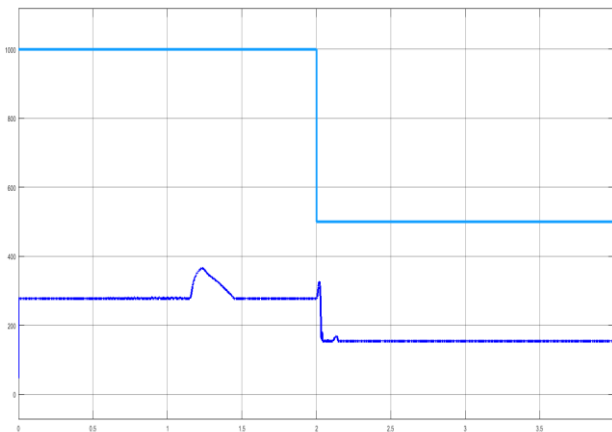


Fig. 6 Solar irradiation and voltage output of PVA

The above (fig. no 7) are the graphs of solar irradiation and PVA voltage changing with respect to time. The solar irradiation is changed from 1000W/mt2 to 500W/mt2 at 2secs. The total simulation time is 4secs. The below (fig. 7) are the three phase currents of induction machine for the same change in solar irradiation.

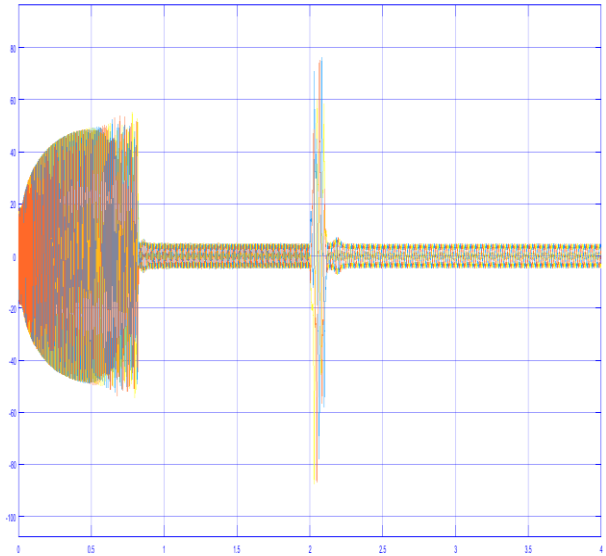


Fig.7 Induction motor three phase currents

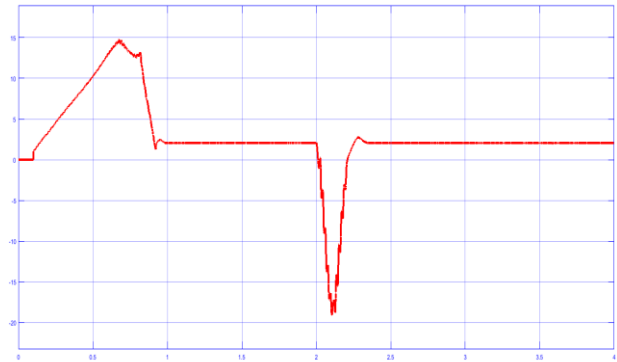


Fig. 8 Electromagnetic torque of induction motor

4. Conclusion and Future Work

4.1 Conclusion

With the above results it can be concluded that the speed of the induction motor is stable with less peak value generation and less settling time. The motor controlled PI controller.. The torque and stator flux, have been controlled independently. The motor is started smoothly. The reference speed is generated by DC link voltage



controller controlling the voltage at DC link along with the speed estimated by the feed forward term incorporating the pump affinity law. The power of PV array is maintained at maximum power point at the time of change in irradiance. This is achieved by using incremental conductance based MPPT algorithm. The model is run by Simulink modelling generating graphs with respect to time.

4.2 Future Scope

The input source PVA can be replaced with fuel cell or wind farm (connected to controlled rectifier) for multiple renewable source feeding the converter. The speed regulator can be updated with fuzzy logic controller, neuro fuzzy controller for faster response of speed with reduced settling speed and ripple in the value.

References

- [1] R. Foster, M. Ghassemi and M. Cota, *Solar energy: Renewable energy and the environment*, CRC Press, Taylor and Francis Group, Inc. 2010.
- [2] M. Kolhe, J. C. Joshi and D. P. Kothari, "Performance analysis of a directly coupled photovoltaic water-pumping system", *IEEE Trans. on Energy Convers.*, vol. 19, no. 3, pp. 613-618, Sept. 2004.
- [3] J. V. M. Caracas, G. D. C. Farias, L. F. M. Teixeira and L. A. D. S. Ribeiro, "Implementation of a high-efficiency, high-lifetime, and low-cost converter for an autonomous photovoltaic water pumping system", *IEEE Trans. Ind. Appl.*, vol. 50, no. 1, pp. 631-641, Jan.-Feb. 2014.
- [4] R. Kumar and B. Singh, "Buck-boost converter fed BLDC motor for solar PV array based water pumping," *IEEE Int. Conf. Power Electron. Drives and Energy Sys. (PEDES)*, 2014.
- [5] Zhang Songbai, Zheng Xu, Youchun Li and Yixin Ni, "Optimization of MPPT step size in stand-alone solar pumping systems," *IEEE Power Eng. Society Gen. Meeting*, June 2006.
- [6] H. Gonzalez, R. Rivas and T. Rodriguez, "Using an artificial neural network as a rotor resistance estimator in the indirect vector control of an induction motor," *IEEE Latin Amer. Trans (Revista IEEE America Latina)*, vol.6, no.2, pp.176-183, June 2008.
- [7] S. K. Sahoo and T. Bhattacharya, "Field Weakening Strategy for a Vector-Controlled Induction Motor Drive Near the Six-Step Mode of Operation," *IEEE Trans. Power Electron.*, vol. 31, no. 4, pp. 3043-3051, April 2016.
- [8] T. Esum and P.L. Chapman, "Comparison of photovoltaic array maximum power point technique," *IEEE Trans. Energy Convers.*, vol.22, no.2, pp.439-449, June 2007.
- [9] F. Liu, S. Duan, F. Liu, B. Liu and Y. Kang, "A variable step size INC MPPT method for PV systems," *IEEE Trans. Ind. Electron.*, vol. 55, no. 7, pp. 2622-2628, July 2008.
- [10] M. A. Elgendy, D. J. Atkinson and B. Zahawi, "Experimental investigation of the incremental conductance maximum power point tracking algorithm at high perturbation rates," *IET Renewable Power Generation*, vol. 10, no. 2, pp. 133-139, Feb. 2016.
- [11] A. B. Raju, S. Kanik and R. Jyoti, "Maximum efficiency operation of a single stage inverter fed induction motor PV water pumping system", *Emerging Trends in Eng. And Tech. (ICETET)*, pp.905-910, 2008.
- [12] Singh, et al., "A mechanism for discovery and prevention of cooperative black hole attack in mobile ad hoc network using AODV protocol." *2014 International Conference on Electronics and Communication Systems (ICECS)*. IEEE, 2014.
- [13] Harsh et al., "Design and Implementation of an Algorithm for Mitigating the Congestion in Mobile Ad Hoc Network." *International Journal on Emerging Technologies* 10.3 (2019): 472-479.
- [14] Singha, Anjani Kumar, Kundu, Shakti, Singh, Songare, Lokendra Singh & Tiwari, Pradeep Kumar (2024) Measuring network security in the cloud : A roadmap for proactive defense, *Journal of Discrete Mathematical Sciences and Cryptography*, 27:2-B, 889-902, DOI: 10.47974/JDMSC-1964.
- [15] Singha, Anjani Kumar, Singh, Harsh Pratap, Kundu, Shakti, Tiwari, Pradeep Kumar & Rajput, Ajeet Singh (2024) Estimating computer network security scenarios with association rules, *Journal of Discrete Mathematical Sciences and Cryptography*, 27:2-A, 223-236, DOI: 10.47974/JDMSC-1876.
- [16] Singh et al. "Detection and Prevention of Black Hole attack In Modified AOMDV Routing Protocol in MANET", *International Journal of Engineering Applied Science and Management*, 2020, vol. 1, issue-1.
- [17] Rashmi et al, "Prevention Mechanism of Black Hole and Jamming Attack in Mobile Ad Hoc Network", *Journal of Harmonized Research in Engineering*, 2020, vol 8, issue 1.
- [18] Leena et al., "Reliable Positioning-Based Routing Using Enhance Dream Protocol In Manet", *International Journal of Scientific & Technology Research*, Vol 9, issue-1
- [19] C. Jain and B. Singh, "Single-phase single-stage multifunctional grid interfaced solar photo-voltaic system under abnormal grid conditions", *IET Gener., Trans. & Distr.*, vol. 9, no. 10, pp. 886-894, Feb. 2015.
- [20] S. Shukla and B. Singh, "Single stage SPV array fed speed sensorless vector control of induction motor drive for water pumping," *IEEE Int. Conf. Power Electron., Intelligent Control and Energy Systems (ICPEICES)*, 2016, pp. 1-6, 2016.



- [21] J. Titus, J. Teja, K. Hatua and K. Vasudevan, "An Improved Scheme for Extended Power Loss Ride-Through in a Voltage-Source-Inverter-Fed Vector-Controlled Induction Motor Drive Using a Loss Minimization Technique," IEEE Trans. Ind. Appl., vol. 52, no. 2, pp. 1500-1508, March-April 2016.